










A-UNIQUE

# ASIA UNIQUE LED LIGHTING CO., LTD

## AU27 Low Glare LED Downlight

## AU27-DL Series

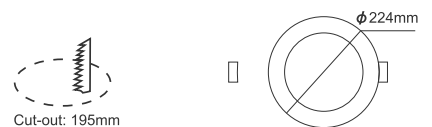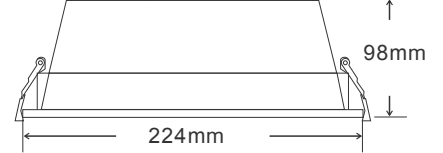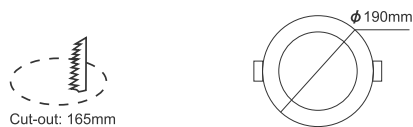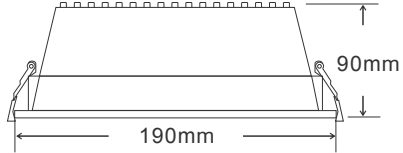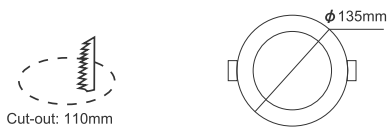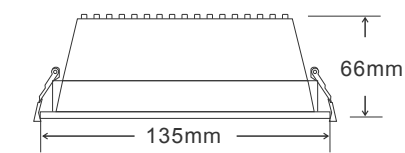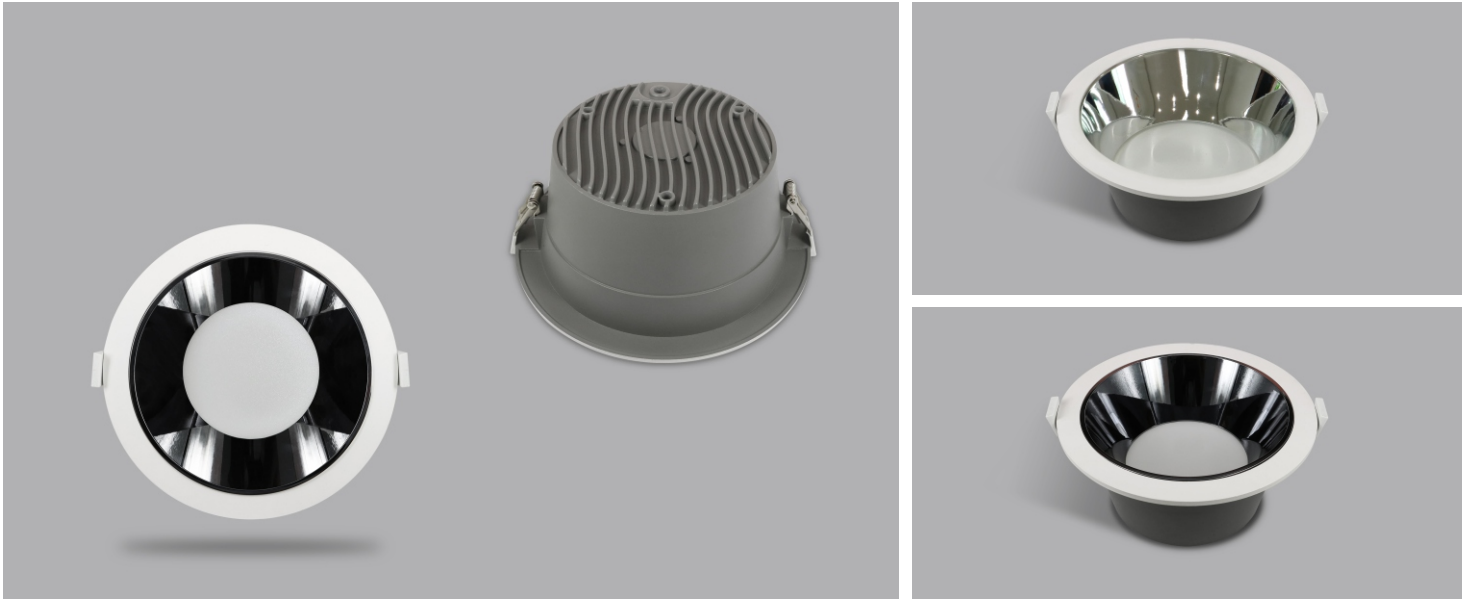



## General Features:

- Low Glare downlight with super soft light
- Flicker free dimming led driver, 90Ra led chip and 3-CCT are available if required.
- Matt white trim, Grey heat-sink
- Glossy black / Glossy chrome reflector
- IP44 rated for the front, ideal for corridors, bathrooms, dining rooms and bedroom, etc.
- 4inch, 6inch & 8inch available3
- SAA, C-tick, CE and RoHS approved
- 3 years warranty

## Technical Specifications

Model No.	AU27-DL12WXX	AU27-DL15WXX	AU27-DL20WXX-6	AU27-DL25WXX-6	AU27-DL30WXX-8	AU27-DL35WXX-8
Dimension(mm)	Ø135*H66	Ø135*H66	Ø190*H90	Ø190*H90	Ø224*H98	Ø224*H98
Cutout(mm)	110	110	165	165	195	195
Wattage(w)	12W	15W	20W	25W	30W	35W
Input Voltage(v)	AC220~240V					
Light Source	SMD2835					
SDCM	<6					
CCT(K)	1 CCT	2700K/3000K/4000K/5000K//6000K/6500K				
	3 CCT	3000K-4000K-6000K or as per request				
Luminous Flux (lm)±5%	912-1032	1140-1290	1600-1800	2000-2250	2400-2700	2800-3150
CRI	>80Ra or >90Ra optional					
Beam Angle(°)	75°					
Dimming option	Yes, Triac Dimming (Flicker Free if required)					
Fire Rated	Available, if required					
Protection Class	Class III					
Degree of protection(IP)	IP20 for the whole luminaire, IP44 for the front portion of the lamp					
Material	Trim	Aluminum				
	Heat-sink	Aluminum				
	Diffuser	PMMA				
Color	Trim	White				
	Reflector	Glossy black / Glossy Chrome				
L70	54000hrs					
Operation Temp.(°C)	-20~ 45°C					
Installation	Recessed					
Certificates	CE, Rohs, SAA & C-tick					
Warranty	3 Years					


## Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU27-DL12WXX	0.60	1	145*145*80	0.65	27	43.5*43.5*27	17.5	13500	25920	30115
AU27-DL15WXX	0.60	1	145*145*80	0.65	27	43.5*43.5*27	17.5	13500	25920	30115
AU27-DL20WXX-6	0.73	1	190*190*105	0.90	16	44*39.5*40	15.0	5920	11360	13200
AU27-DL25WXX-6	0.73	1	190*190*105	0.90	16	44*39.5*40	15.0	5920	11360	13200
AU27-DL30WXX-8	1.05	1	230*230*115	1.26	16	47.5*47.5*48	21.0	3760	7264	8400
AU27-DL35WXX-8	1.05	1	230*230*115	1.26	16	47.5*47.5*48	21.0	3760	7264	8400


\* Above datas are for downlights with flicker free led driver.

# Installation Instructions


1. Open a hole on the ceiling according to the cutout size of the downlight

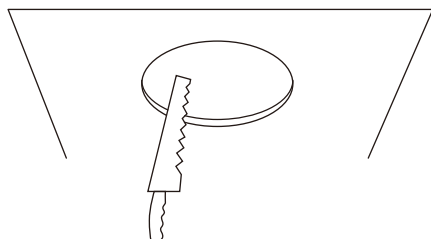


2. Use a screwdriver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.

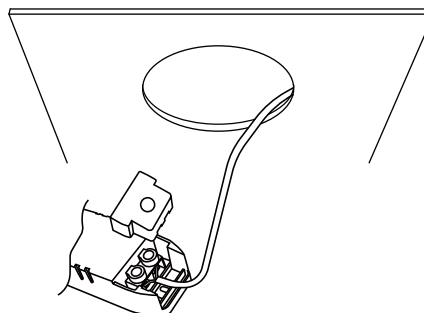

3. Connect the downlight with driver, hold back the spring clips then push the downlight into the hole.


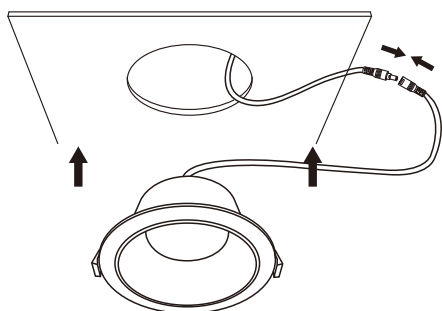


4. Make sure the downlight fixed tightly in ceiling, turn on the power.



\* For the product with 3-color Selection, please select the light color(WW/CW/DL) before installation.

Dip switch for color selection

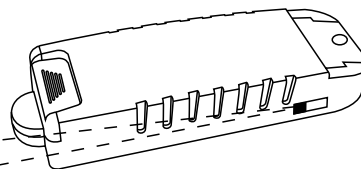

## Please Note:

- \* Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- \* Must be installed, or connected by licenced electrician.
- \*The Luminaires are intended for indoor use only.

## Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets