









A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

AU23 Low Glare LED Downlight

AU23-DL Series

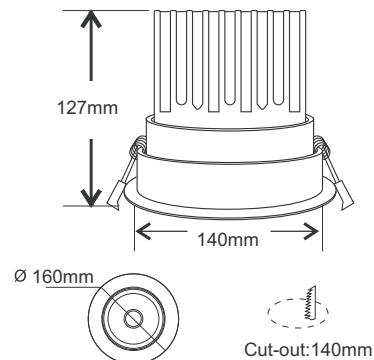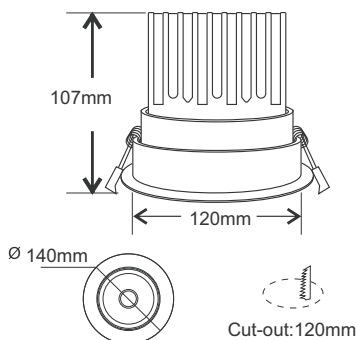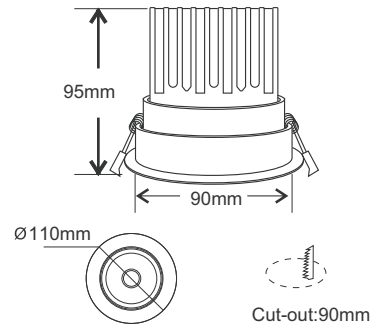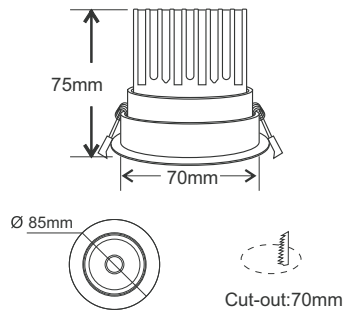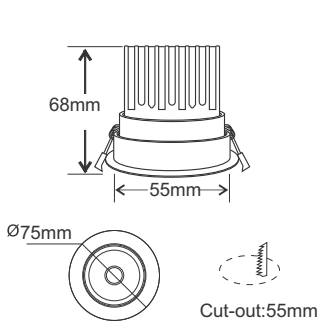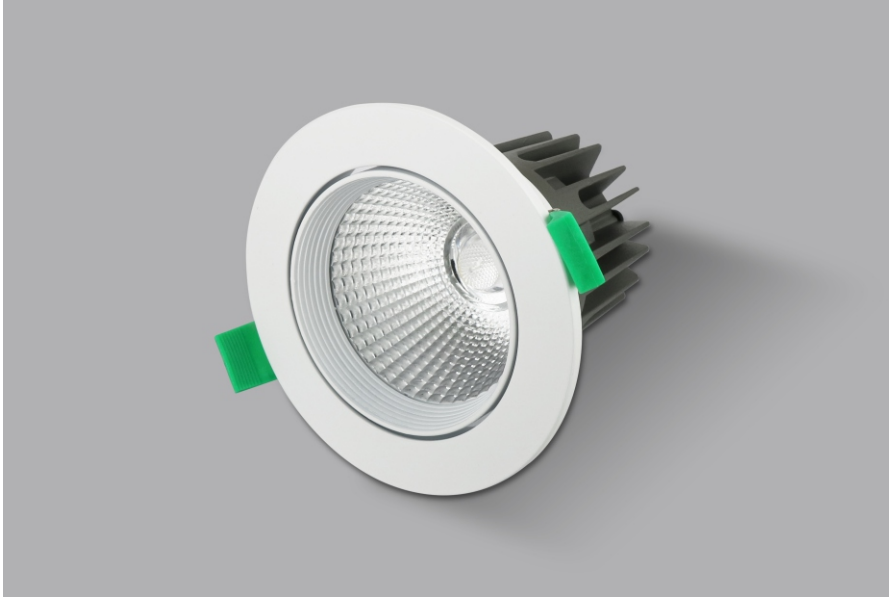



General Features:

- Distinctive design, deep recess and trimless fitting
- Low Glare downlight with superb soft light glow
- Tiltable fitting, can adjust angle
- Flicker free dimming led driver, 90Ra led chip and 3-CCT are available if required
- IP44 rated for the front, ideal for corridors, bathrooms, dining rooms and bedroom, etc.
- SAA, C-tick, CE and RoHS approved
- 3years warranty

Technical Specifications

Model No.	AU23-DL7W55XX	AU23-DL7W70XX	AU23-DL10W70XX	AU23-DL12W90XX	AU23-DL15W90XX	AU23-DL18W90XX	AU23-DL25W120XX	AU23-DL30W140XX	AU23-DL40W140XX
Dimension(mm)	Ø70*H65	Ø85*H75	Ø85*H75	Ø110*H95	Ø110*H95	Ø110*H95	Ø140*H107	Ø160*H127	Ø160*H127
Cutout(mm)	55	70	70	90	90	90	120	140	140
Wattage(w)	7W	7W	10W	12W	15W	18W	25W	30W	40W
Input Voltage(v)	AC220~240V								
Light Source	COB								
SDCM	<6								
CCT(K)	1 CCT	2700K/3000K/4000K/5000K//6000K/6500K							
	3 CCT	2700K-4000K-6500K or 3000K-4000K-6000K							
Luminous Flux (lm)±5%	455-490	455-490	700-750	840-900	1050-1125	1350-1440	1875-2000	2250-2400	3000-3200
CRI	>80Ra or >90Ra optional								
Beam Angle(°)	15°/24°/38°/60°								
Dimming option	Yes, Triac Dimming (Flicker Free if required)								
Fire Rated	Not Available								
Protection Class	Class III								
Degree of protection(IP)	IP20								
Material	Trim	Aluminum							
	Heat-sink	Aluminum							
	Diffuser	PMMA							
Trim Color	white/black/silver/satin chrome								
L70	>54000Hrs								
Operation Temp.(°C)	-20~ 45°C								
Installation	recessed								
Certificates	CE, RoHS, SAA & C-tick								
Warranty	3 Years								


Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU23-DL7W55XX	0.32	1	115*115*105	0.37	36	48*36*33.5	14.0	17712	35424	41328
AU23-DL7W70XX	0.40	1	115*115*120	0.45	36	48*36*38	15.6	16416	32832	38016
AU23-DL10W70XX	0.40	1	115*115*120	0.45	36	48*36*38	15.6	16416	32832	38016
AU23-DL12W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL15W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL18W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL25W120XX	0.85	1	160*160*136	1.55	12	50*34*30	20.6	6528	13080	15504
AU23-DL30W140XX	1.28	1	180*180*160	1.98	12	56*38*34	25.5	6528	13080	15504
AU23-DL40W140XX	1.28	1	180*180*160	1.98	12	56*38*34	25.5	6528	13080	15504


*Above datas are for downlights with flicker free led driver.

Installation Instructions


1. Open a hole according to the cutout size of led downlight.

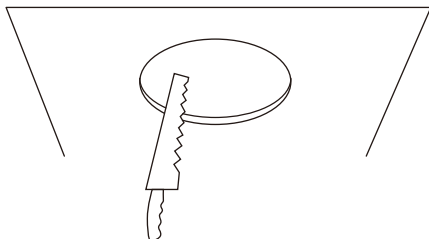


2. Use screw-driver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.

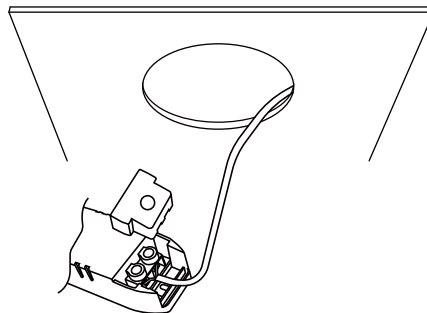


3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.

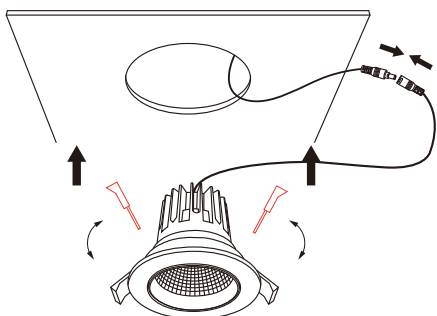

4. Make sure the downlight fixed tightly in ceiling, turn on the power.

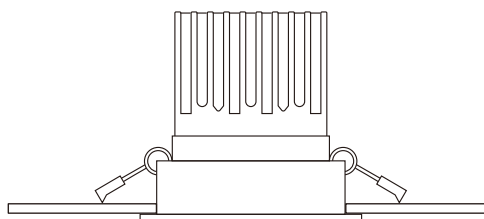

* For the product with 3-color Selection, please select the light color(WW/CW/DL)before installation.

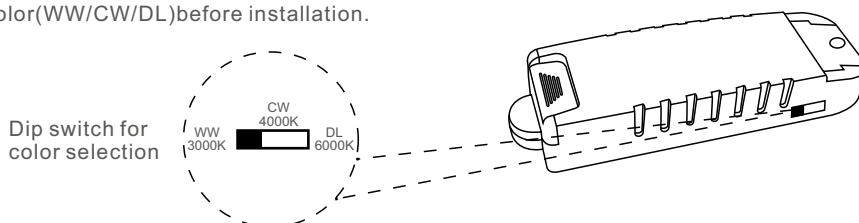

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets