










A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

AU22 Low Glare LED Downlight

AU22-DL Series

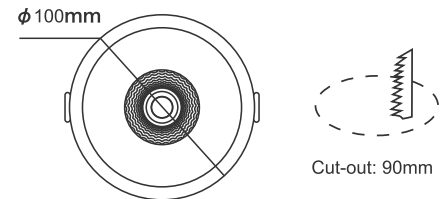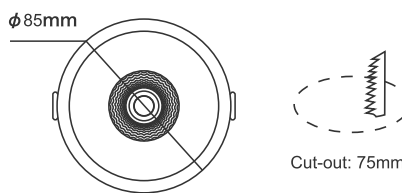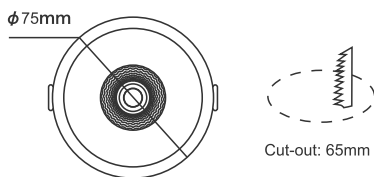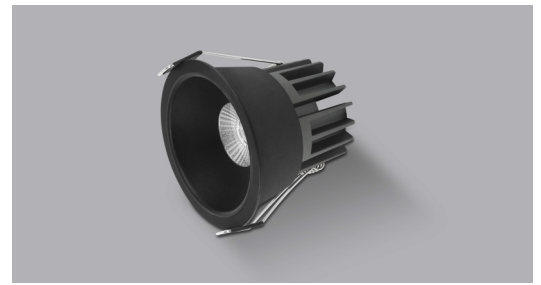



General Features:

- Distinctive design, deep recess and trimless fitting
- Low Glare downlight with superb soft light glow
- Flicker free dimming led driver, 90Ra led chip and 3-CCT are available if required
- Various reflector colors for choice: matt white, matt black, matt gold, glossy black, rose gold plating
- IP44 rated for the front, ideal for corridors, bathrooms, dining rooms and bedroom, etc.
- SAA, C-tick, CE and RoHS approved
- 3years warranty

Technical Specifications

Model No.	AU22-DL7W65XX	AU22-DL7W75XX	AU22-DL10W75XX	AU22-DL10W90XX	AU22-DL12W90XX	AU22-DL15W90XX
Dimension(mm)	Ø75*H68	Ø85*H75	Ø85*H75	Ø100*H95	Ø100*H95	Ø100*H95
Cutout(mm)	65	75	75	90	90	90
Wattage(w)	7W	7W	10W	10W	12W	15W
Input Voltage(v)	AC220~240V					
Light Source	COB					
SDCM	<6					
CCT(K)	1 CCT	2700K/3000K/4000K/5000K//6000K/6500K				
	3 CCT	2700K-4000K-6500K or 3000K-4000K-6000K				
Luminous Flux (lm)±5%	490-510	520-550	850-870	850-870	1020-1044	1200-1300
CRI	>80Ra or >90Ra optional					
Beam Angle(°)	15°/24°/38°/60°					
Dimming option	Yes, Triac Dimming (Flicker Free if required)					
Fire Rated	Available, if required					
Protection Class	Class III					
Degree of protection(IP)	IP20 for the whole luminaire, IP44 for the front portion of the lamp					
Material	Trim	Aluminum				
	Heat-sink	Aluminum				
	Diffuser	PMMA				
Color	Trim	white / black				
	Reflector	matt white / matt black / matt gold / glossy black / rose gold plating				
L70	>54000Hrs					
Operation Temp.(°C)	-20~ 45°C					
Installation	recessed					
Certificates	CE, RoHS, SAA & C-tick					
Warranty	3 Years					


Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU22-DL7W65XX	0.35	1	115*115*105	0.40	36	48*36*33.5	15.2	17712	35424	41328
AU22-DL7W75XX	0.40	1	115*115*130	0.45	36	48*36*41	17.0	14256	28512	33696
AU22-DL10W75XX	0.40	1	115*115*130	0.45	36	48*36*41	17.0	14256	28512	33696
AU22-DL10W90XX	0.47	1	115*115*140	0.51	36	48*36*44	19.4	13824	27648	32832
AU22-DL12W90XX	0.47	1	115*115*140	0.51	36	48*36*44	19.4	13824	27648	32832
AU22-DL15W90XX	0.47	1	115*115*140	0.51	36	48*36*44	19.4	13824	27648	32832


* Above datas are for downlights with flicker free led driver.

Installation Instructions


1. Open a hole according to the cutout size of led downlight.

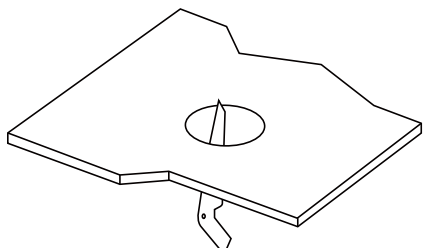


2. Use screw-driver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.




3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.



4. Make sure the downlight fixed tightly in ceiling, turn on the power.

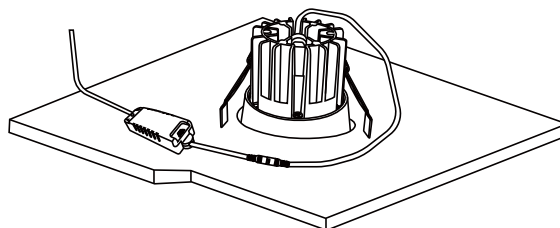

* For the product with 3-color Selection, please select the light color(WW/CW/DL) before installation.

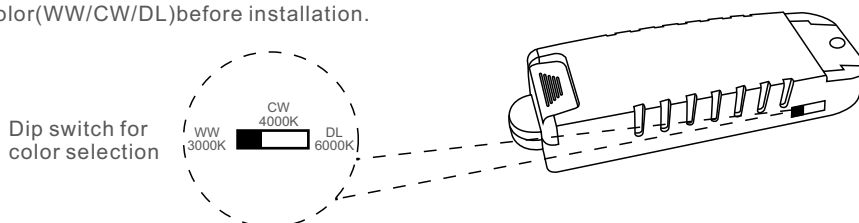

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets