

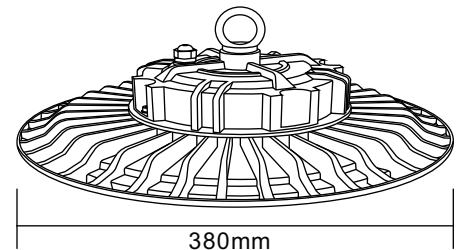
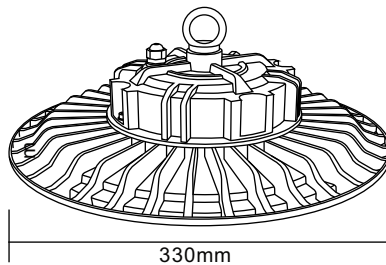



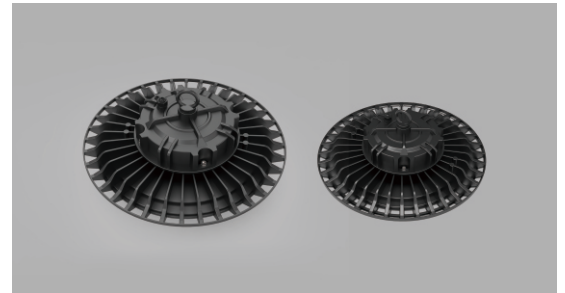

ASIA UNIQUE LED LIGHTING CO., LTD

AU05 LED HighBay With Lens

AU05-HB Series

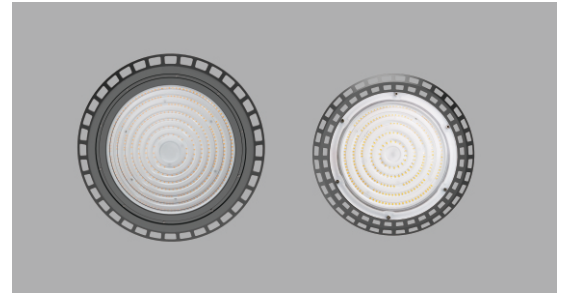



General Features:

- * Hollow heat sink design increase more airflow for better heat dissipation.
- * High CRI SMD2835 LED Chips, $\geq 95\text{Ra}$.
- * Reliable Dali Dimming driver.
- * Waterproof IP65 design, suitable to damp & wet location.
- * Three dimensions. Lighter weight and smaller volume can help customer save freight cost.
- * LM80/IES reports available.
- * SAA C-tick CE RoHS certifications.
- * 5 years warranty.

Technical Specifications




Model No.	AU05-HB70W-V3	AU05-HB90W-V3	AU05-HB110W-V3	AU05-HB140W-V3	AU05-HB200W-V3	AU05-HB240W-V3
Dimension(mm)	$\varnothing 280 \times 172$	$\varnothing 280 \times 172$	$\varnothing 280 \times 172$	$\varnothing 330 \times 178$	$\varnothing 380 \times 138$	$\varnothing 380 \times 138$
Cutout(mm)	/	/	/	/	/	/
Wattage(w)	70W	90W	110W	140W	200W	240W
Input Voltage(v)	AC220~240V					
Light Source	SMD2835					
CCT(K)	3000K/4000K/5000K/5700K/6500K					
Luminous Flux (lm) $\pm 5\%$	8400lm $\pm 5\%$	10800lm $\pm 5\%$	13200lm $\pm 5\%$	16800lm $\pm 5\%$	24000lm $\pm 5\%$	28800lm $\pm 5\%$
CRI	$\geq 95\text{Ra}$					
Beam Angle($^{\circ}$)	90 $^{\circ}$					
Driver	Sosen, Dali Dimming					
Sensor option	Available					
Emergency option	Available					
Protection Class	Class I					
Degree of protection(IP)	IP65					
Material	Heatsink	Aluminum				
	Cover	PC				
L70	$> 54000\text{Hrs}$					
Glow Wire Test($^{\circ}\text{C}$)	650 $^{\circ}\text{C}$					
Operation Temp.($^{\circ}\text{C}$)	-20~ 45 $^{\circ}\text{C}$					
Installation	Suspended					
Certi cates	CE, Rohs, SAA & C-tick					
Warranty	5 Years					

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HP (PCS)
AU05-HB70W-V3	2.6	/	/	/	1	30x30x20CM	3.2	1489	3089	3508
AU05-HB90W-V3	2.6	/	/	/	1	30x30x20CM	3.2	1489	3089	3508
AU05-HB110W-V3	2.6	/	/	/	1	30x30x20CM	3.2	1489	3089	3508
AU05-HB140W-V3	3.4	/	/	/	1	36x37x21CM	4.0	1009	2082	2367
AU05-HB200W-V3	4.7	/	/	/	1	43x43x21CM	5.3	650	1350	1620
AU05-HB240W-V3	4.7	/	/	/	1	43x43x21CM	5.3	650	1350	1620

Installation Instructions

Installation:



Warning:

- This product must be installed by a licensed electrician
- Check whether the product has been damaged during transport. Do not operate/install product which appears damaged
- Verify the supply voltage is the same as rated luminaire voltage
- Disconnect or turn off the power before installation
- Installation must adhere to local and national wiring rules

Packing List:

High bay	1piece
Hook	1piece

Application:

