














A-UNIQUE

# ASIA UNIQUE LED LIGHTING CO., LTD

## AU06 Build-in driver Downlight

## AU06-DL Series

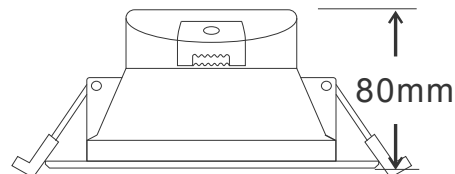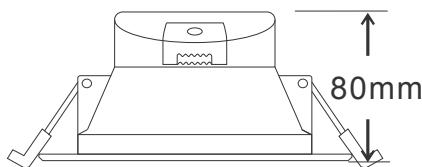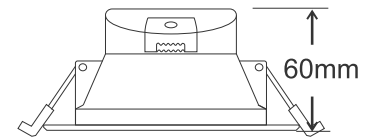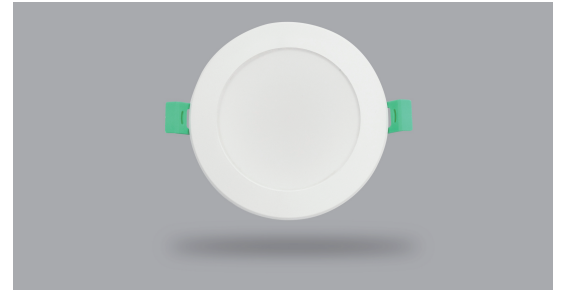

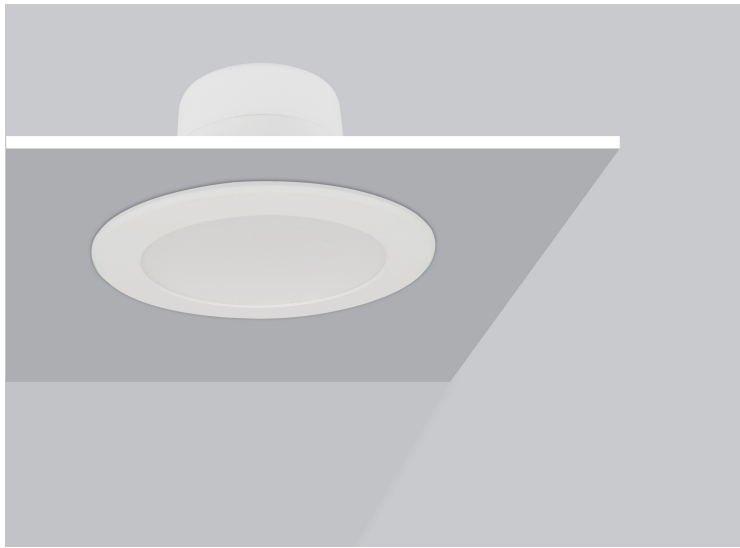

## General Features:

- Support most European and Australian dimmers
- 3-CCT are available if required
- SAA, C-tick, CE and RoHS approved
- 3years warranty

## Technical Specifications


Model No.	AU06-DL7W-B25	AU06-DL10W-B30	AU06-DL15W-B40	AU06-DL18W-B60	AU06-DL20W-B80
Dimension(mm)	Ø90*H60	Ø115*H60	Ø145*H65	Ø180*H80	Ø230*H80
Cutout(mm)	70	90	110	150	170
Wattage(w)	7W	10W	15W	18W	20W
Input Voltage(v)	AC220~240V				
Light Source	SMD2835				
SDCM	<6				
CCT(K)	1 CCT	2700K/3000K/4000K/5000K//6000K/6500K			
	3 CCT	2700K-4000K-6500K or 3000K-4000K-6000K			
Luminous Flux (lm)±5%	400-500	740-800	1140-1260	1368-1512	1520-1680
CRI	>80Ra				
Beam Angle(°)	90°				
Dimming option	Available				
Fire Rated	Not available				
Protection Class	Class III				
Degree of protection(IP)	IP44				
Material	Plastic+Aluminum				
Color	White				
L70	>54000Hrs				
Operation Temp.(°C)	-20~ 45°C				
Installation	Recessed				
Certificates	CE, Rohs, SAA & C-tick				
Warranty	3 Years				

## Packing information


Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU06-DL7W-B25	0.15	1	115*115*65	0.17	30	60*24.5*21.5	6	31454	39312	43560
AU06-DL10W-B30	0.27	1	115*115*75	0.30	48	50*37*33	16	57647	39312	43560
AU06-DL15W-B40	0.35	1	115*115*75	0.40	20	50*37*33	9	57647	39312	43560
AU06-DL18W-B60	0.39	1	115*115*90	0.52	16	41*38*42	9.5	18548	39312	43560
AU06-DL20W-B80	0.52	1	115*115*90	0.70	14	41*38*42	10.8	18548	39312	43560

# Installation Instructions


1. Open a hole according to the cutout size of led downlight.

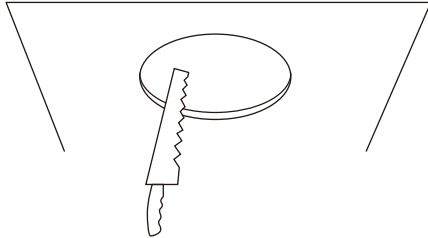

2. Connect the wire, hold back the spring clip then push the downlight into the hole.

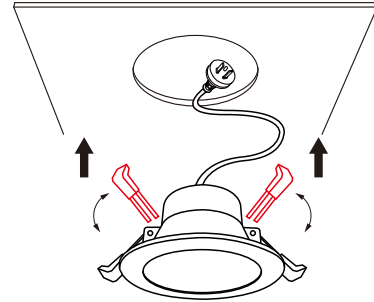


3. Make sure the downlight fixed tightly in ceiling, turn on the power.

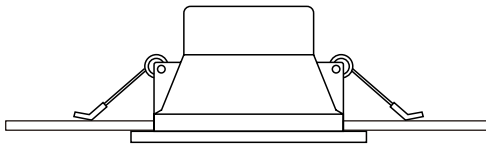

\* For the product with 3-color Selection, please select the light color(WW/CW/DL)before installation.

DIP switch on the back side for color selection

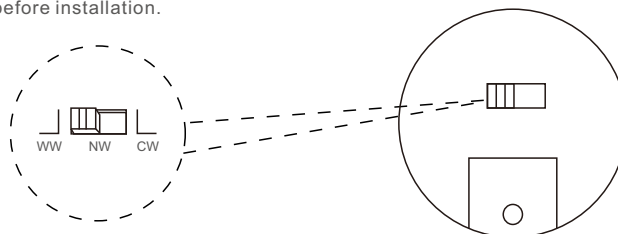

## Please Note:

- \* Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- \* Must be installed, or connected by licenced electrician.
- \* The Luminaires are intended for indoor use only.

## Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets