




A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

Slimline LED Batten

AU05-BAT Series

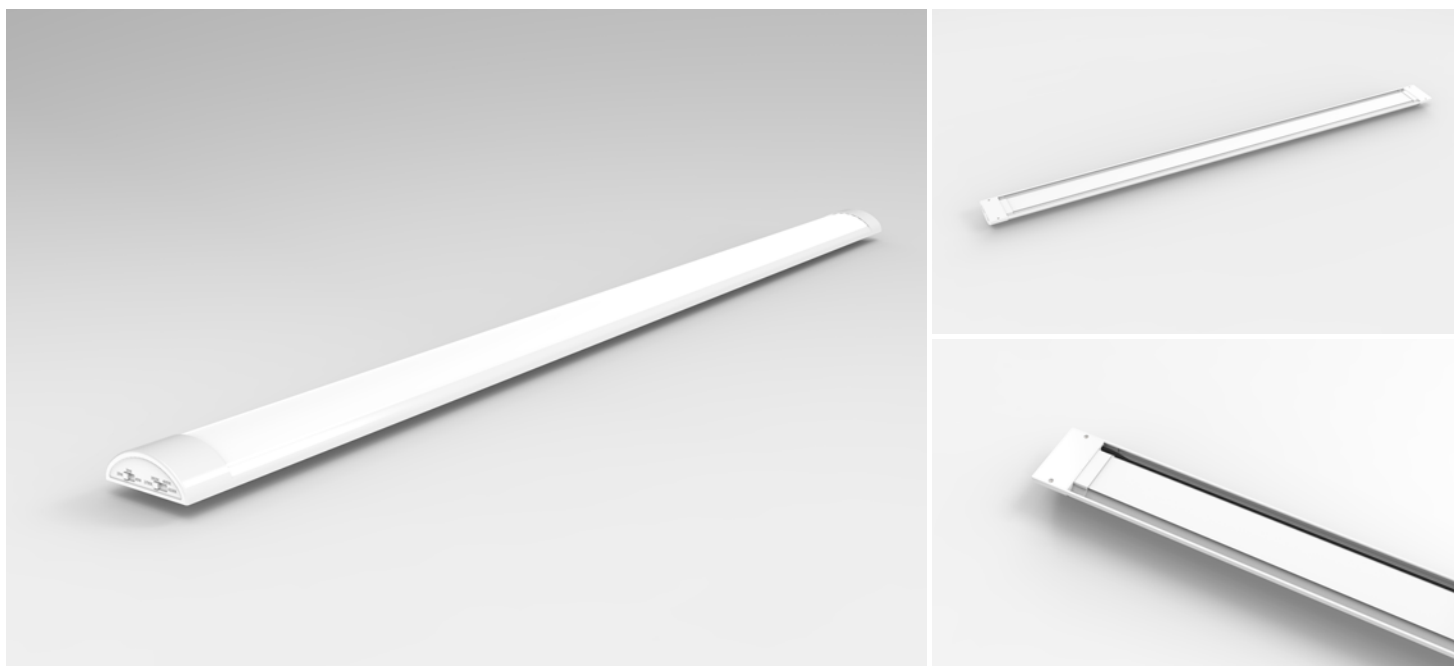



General Features:

- High power factor (>0.9) , energy-saving and eco-friendly
- Flicker-free, compliant with ERP regulation
- 3 Power and 4 CCT (3000K/4000K/5000K/6500K)all-in-one Batten
- Aluminum 6063 heat-sink for excellent heat dissipation
- High Luminous efficacy, over 120lm/w
- Even light output, no Dark area
- Surface mount or suspended mount
- 3 Years Warranty

Technical Specifications

Model No.		AU05-BAT202F	AU05-BAT404F	AU05-BAT505F	AU05-BAT606F
Dimension(mm)		600*75*26	1200*75*26	1500*75*26	1800*75*26
Cutout(mm)		/	/	/	/
Wattage(w)		10W/15W/20W	20W/30W/40W	30W/40W/50W	40W/50W/60W
Input Voltage(v)		AC220~240V			
Light Source		SMD2835			
SDCM		<6			
CCT(K)		3000K-4000K-5000K-6500K			
Luminous Efficacy(lm/w)±5%		120lm/w	120lm/w	120lm/w	120lm/w
CRI		>80Ra			
Beam Angle(°)		120°			
Dimming option		/			
Sensor option		Available			
Emergency Kits		Not Available			
Protection Class		Class II			
Degree of protection(IP)		IP40			
Impact Resistance(IK)		/			
Material	Heatsink	Aluminum			
	Diffuser	PC			
L70		>54000Hrs			
Glow Wire Test(°C)		650°C			
Operation Temp.(°C)		-20~ 45°C			
Installation		Surface Mounted / Suspended			
Certificates		CE, Rohs, UKCA			
Warranty		3 Years			

Packing information


Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU05-BAT202F	0.27	1	620*78*28	0.30	20	63.5*33*16	6.5	17360	35680	39700
AU05-BAT404F	0.5	1	1220*78*28	0.52	20	123.5*33*16	11.3	8480	17600	19440
AU05-BAT505F	0.6	1	1520*78*28	0.64	15	153.5*25*16	13.9	6840	14120	15140
AU05-BAT606F	0.7	1	1820*78*28	0.75	15	183.5*25*16	16.3	5980	12280	13200

Installation Instructions

Surface Mounted

A. Drill 2 proper holes at the ceiling.


Gently knock the provided plastic expansion tubes provided into the pre-drilled holes, ensuring the plastic tubes are flush with the mounting surface.



C Wiring




B. Take the flush mounting clips and line up the fixing holes to the pre-drilled location holes on your mounting surface. Fix both flush mounting clips using the screws provided.




D. Clip the slim LED batten onto the flush mounted clips.

NOTE: Ensure installation is correct before switching on the fitting to test.




Suspended Mounted


Step1: Insert the ropes to the clips and adjust the length.




Step2: Insert the ropes into the screw nuts.





Step3: Drill holes in the ceiling and screw in the mounting sockets.



Step4: Screw the nuts into the mounting sockets.



Step5: Clip the slim LED batten onto the clips

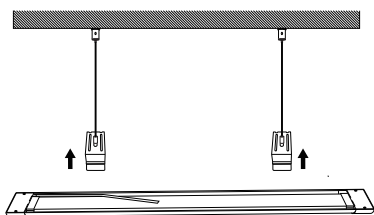

Applications:

- Warehouses
- Supermarkets
- Shopping Malls
- Office Buildings
- Workshops
- Car Parks