






A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

AU36 Fire Rated LED Downlight 2 Power + 4 CCT

Versatile IV Series

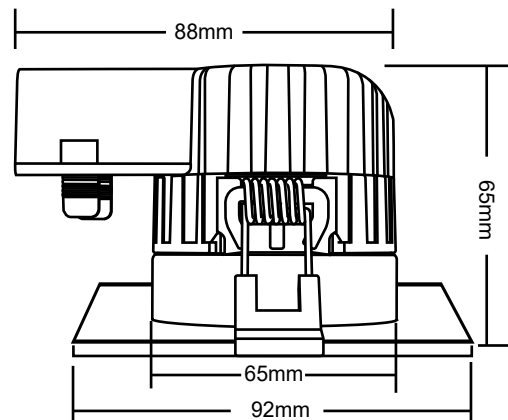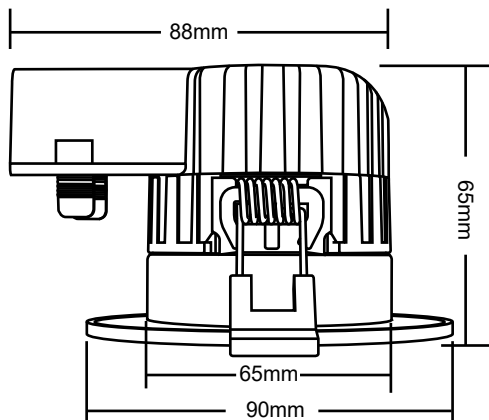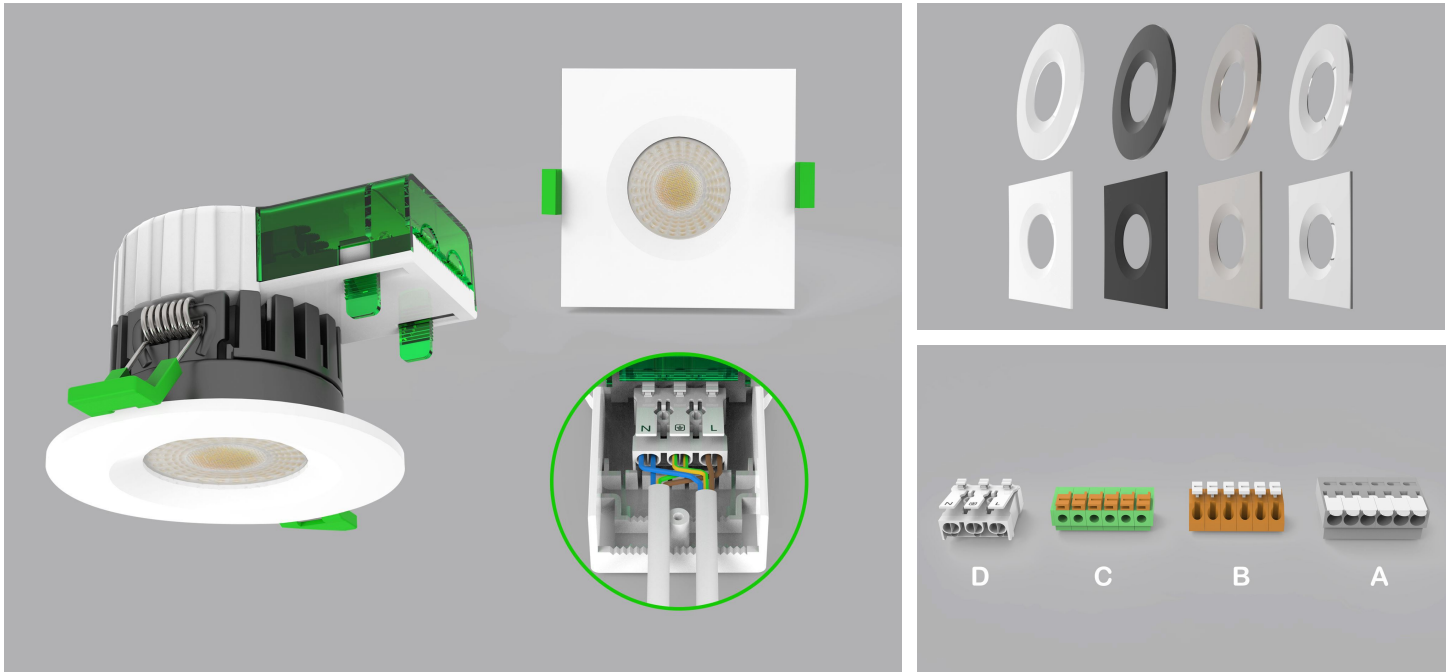




General Features:

- Dual wattage control: 5W / 8W selectable
- 4CCT: 2700K 3000K 4000K 6000K selectable via switch
- Interchangeable bezel: Round or Square , Can be white / black / polished silver /brushed chrome
- Flicker Free Driver: For better visual comfort
- Triac Dimmable,Compatible to most branded dimmers, and C-bus2 system
- Fire Rated: 90mins - BS476-21 (For Europe)
- IP65 Rated for front portion
- CE and RoHS approved, Complies with new ERP regulation
- 3 years warranty

Technical Specifications

Model No.	AU36-DL0508-4C	
Dimension(mm)	Ø90*H65	
Cutout(mm)	65	
Wattage(w)	5W/8W selectable	
Input Voltage(v)	AC200~240V	
Light Source	SMD2835	
SDCM	<6	
4 CCT(K)	2700K- 3000K-4000K-6000K Switchable	
Luminous Flux (lm)±5%	5W (475-550lm) 8W (640-760lm)	
CRI	>80Ra	
Beam Angle(°)	60°	
Driver option	Triac Dimming, flicker free	
Fire Rated	Yes, available by request	
Protection Class	Class I	
Degree of protection(IP)	IP65 -front , IP20 - whole lamp	
Material	Housing	Aluminum + Iron
	Diffuser	PC
Color	Bezel	white / black / silver / brushed chrome
	Housing	White/Black
L70	>54000Hrs	
Operation Temp.(°C)	-20~ 45°C	
Installation	Recessed Mount	
Certificates	CE, Rohs, SAA & C-tick	
Warranty	3 Years	

Installation Instructions

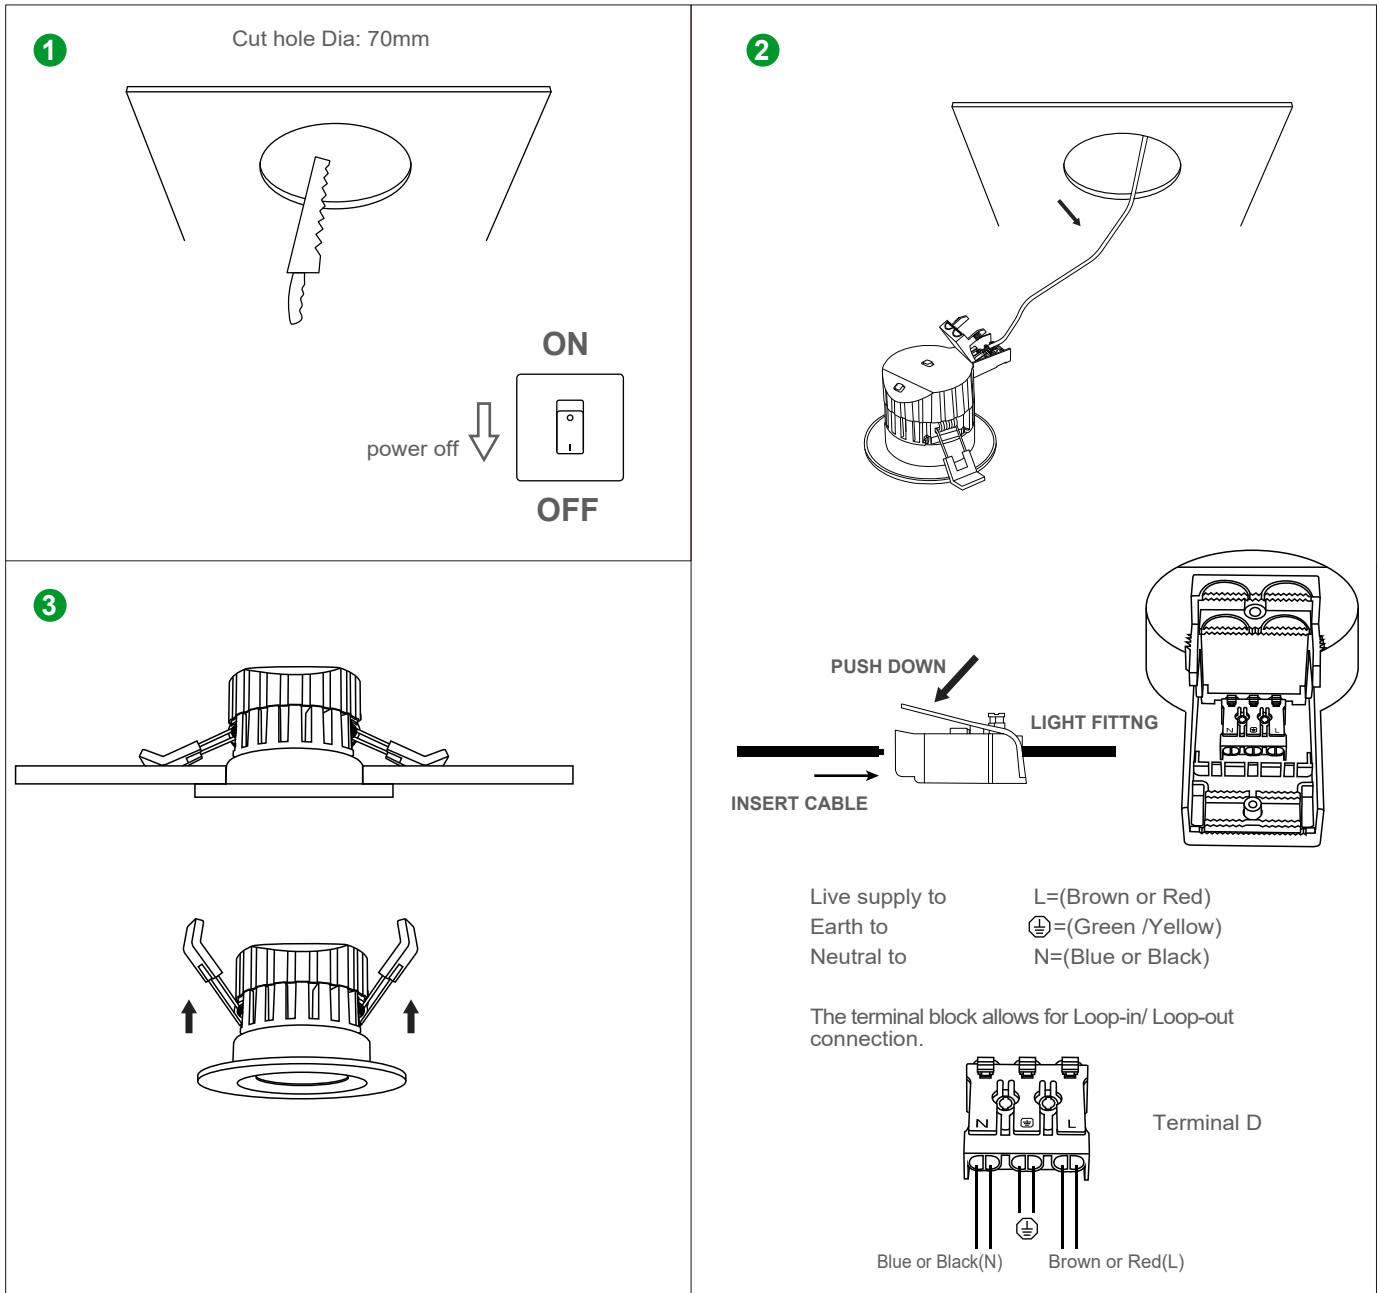

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets